Excellence Industries

Profit from the Power of Partnership.



EDC

DIPPING CABINET

KEY FEATURES

- Sneeze shield
- Single-layer heat reflective glass lids
- Dual condensing system
- Frameless lids
- Available in curved or straight front glass
- 6-foot cord
- Environmentally friendly R-290 refrigerant
- Temperature range of -15°F to +5°F

ADVANTAGES

- Designed for dipping cabinet applications
- Four-model lineup covers 4 or 8 displayed three-gallon tubs
- Can holders with spill guard support clean counter use
- Sneeze shield and frameless lids improve dipping-service access



EDC-8CHC

DOE LISTED

Complies with 2017 DOE standards
for commercial freezer and ice cream freezer

1950 Joe McIntosh Rd
Plant City, FL 33565
800.441.4014 | 813.870.0340
www.excellenceindustries.com



EDC

DIPPING CABINET

SPECIFICATIONS

Model	EDC-4HC	EDC-4CHC	EDC-8HC	EDC-8CHC
Cubic Feet	5.0	5.0	12.5	12.5
Approx. Weight (Net)	178 lb (81 kg)	177 lb (80 kg)	272 lb (123 kg)	277 lb (126 kg)
Approx. Weight (Shipping)	188 lb (85 kg)	187 lb (85 kg)	283 lb (128 kg)	288 lb (131 kg)
Running Amps	3.2	3.2	4.3	4.3
Compressor HP	1/5	1/5	1/4	1/4
3-Gal. Tubs Displayed	4	4	8	8
Container Quantity	140	110	72	60

NEMA 5-15P



115 / 60 / 1


AVAILABLE OPTIONS

- Graphics
- Dipper well
- Night covers
- Locking device


PRODUCT INFORMATION

Click or scan QR to access spec sheets and technical information


EDC-4HC / EDC-8HC

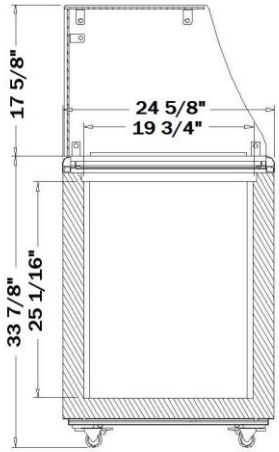


EDC-4CHC / EDC-8CHC

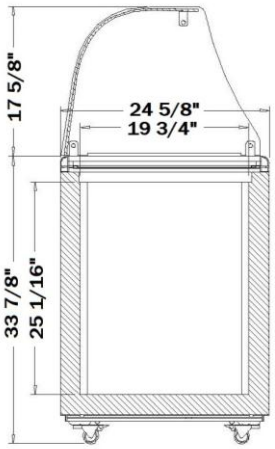

EDC-8HC / EDC-8CHC

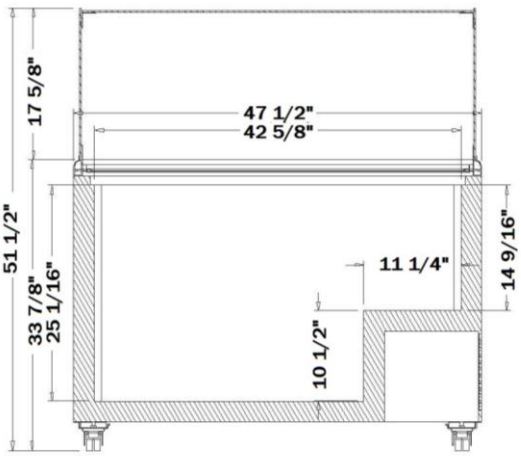

EDC-4HC / EDC-4CHC

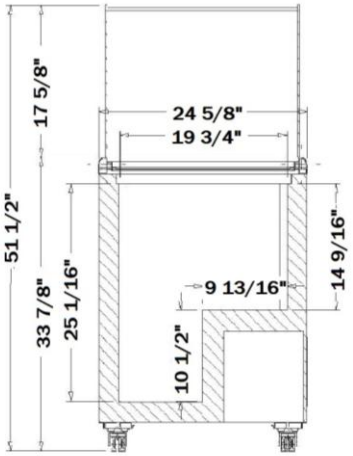

NOTE: Dimensions are in inches.
NOTE: Dimensions are all nominal lengths, use final spec sheet for exact data and model availability.
NOTE: Shipping weight does not include weight of pallets when needed.
NOTE: These merchandisers are designed for use in stores where temperature and humidity do not exceed listed operating conditions.
NOTE: We reserve the right to change specifications and product design without notice

c UL us LISTED

UL CERTIFIED SANITATION

©November 25, 2026 Excellence Industries

Excellence Industries